



# DB25 Pin-out for M-Audio Audiophile 192 card

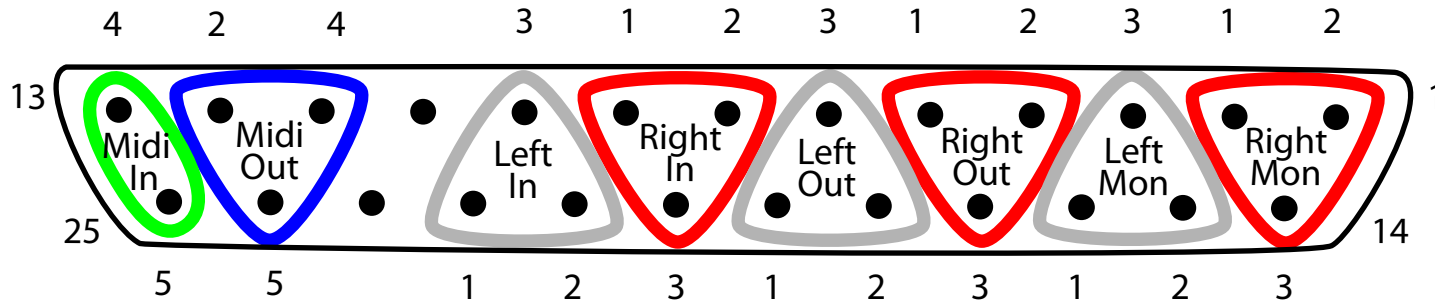

Pin 1	Right Monitor	- high	Pin 14	Right Monitor	- low
Pin 2	Right Monitor	- shield	Pin 15	Left Monitor	- high
Pin 3	Left Monitor	- low	Pin 16	Left Monitor	- shield
Pin 4	Right Output	- high	Pin 17	Right Output	- low
Pin 5	Right Output	- shield	Pin 18	Left Output	- high
Pin 6	Left Output	- low	Pin 19	Left Output	- shield
Pin 7	Right Input	- high	Pin 20	Right Input	- low
Pin 8	Right Input	- shield	Pin 21	Left Input	- high
Pin 9	Left Input	- low	Pin 22	Left Input	- shield
Pin 10	n/c		Pin 23	n/c	
Pin 11	Midi Out	- +5	Pin 24	Midi Out	- IN
Pin 12	Midi Out	- shield	Pin 25	Midi Input	- IN -
Pin 13	Midi Input	- IN +			

Illustration is male DB25 shown from solder side.

1 2 3 - notation on balanced pairs reflect XLR pin configuration.

2 4 5 - notation on Midi pairs reflect pin location on female 5 Pin Din socket.